

CI-Beam-105

Lattice Design and Computational Dynamics II

Dr Öznur Apsimon

The University of Liverpool

The Cockcroft Institute of Accelerator Science and Technology

and Dr Rob Apsimon

Lancaster University

The Cockcroft Institute of Accelerator Science and Technology


Contact

oznur.apsimon@liverpool.ac.uk


r.apsimon@lancaster.ac.uk

Basic equations on lattice design

Circular orbit

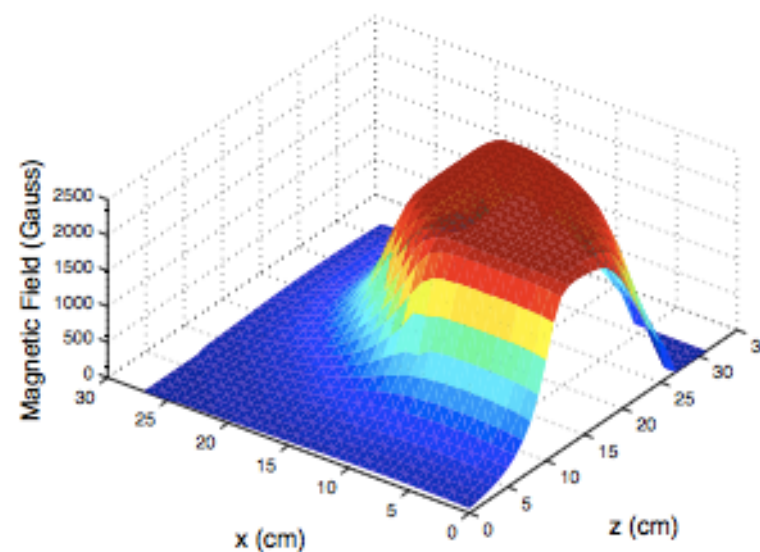

(a)

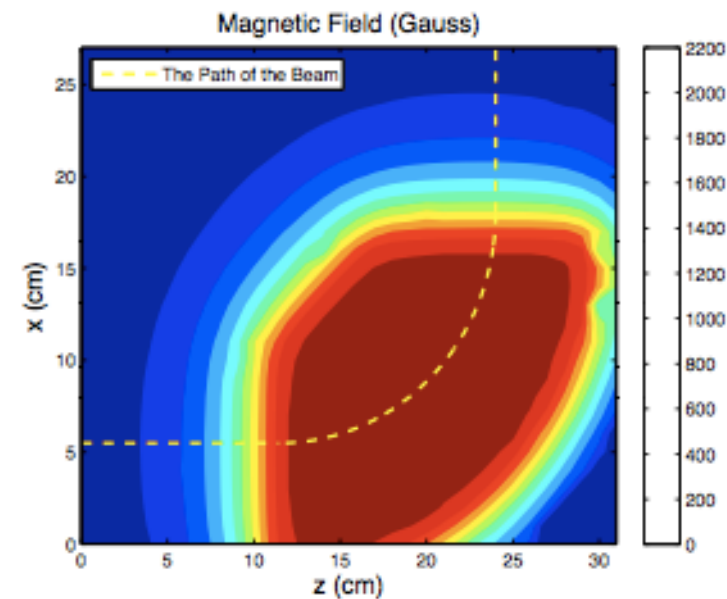

(b)

Magnetic field map of a dipole magnet.

$$\alpha = \frac{ds}{\rho} \approx \frac{dl}{\rho}$$

$$\alpha = \frac{B * dl}{B * \rho}$$

For an entire ring:

$$\alpha = \frac{\int B dl}{B * \rho} = 2\pi \rightarrow \int B dl = 2\pi * \frac{p}{q}$$

Circular orbit

Dipole magnets are used to keep the particles in a circular orbit in the ring type accelerators. Therefore, fundamentally, the geometry is defined by dipoles in an accelerator.

$$\int B ds = N * B_0 * \ell_{eff} = 2\pi \frac{p}{q}$$

ℓ_{eff} -> effective length of the magnet, N -> number of magnets

Example: LHC Dipoles...

$$N = 1232$$

$$l = 15m$$

$$q = +1e$$

$$\int B dl = NlB = 2\pi p/e$$

$$B \approx \frac{2\pi 7000 * 10^9 eV}{e * 1232 * 15m * 3 * 10^8 m/s} = 8.3 Tesla$$

Transfer matrix for periodic lattice cells

$$(1) \quad \sin(a + b) = \sin(a) * \cos(b) + \cos(a) * \sin(b) \quad \cos(a + b) = \cos(a) * \cos(b) - \sin(a)\sin(b)$$

$$(2) \quad \begin{aligned} x(s) &= \sqrt{\epsilon} \sqrt{\beta_s} (\cos\psi_s \cos\phi - \sin\psi_s \sin\phi) \quad \text{Solution of Hill's equation.} \\ x'(s) &= -\frac{\sqrt{\epsilon}}{\beta_s} (\alpha_s \cos\psi_s \cos\phi - \alpha_s \sin\psi_s \sin\phi + \sin\psi_s \cos\phi + \cos\psi_s \sin\phi) \end{aligned}$$

$$(3) \quad \text{Initially,} \quad x(0) = x_0, \psi(0) = 0 \quad \cos\phi = \frac{x_0}{\sqrt{\epsilon}\beta_0} \quad \sin\phi = -\frac{1}{\epsilon} (x'_0 \sqrt{\beta_0} + \frac{\alpha_0 x_0}{\sqrt{\beta_0}})$$

$$(4) \quad \begin{aligned} x(s) &= \sqrt{\frac{\beta_s}{\beta_0}} (\cos\psi_s + \alpha_0 \sin\psi_s) x_0 + (\sqrt{\beta_s \beta_0} \sin\psi_s) x'_0 \\ x'(s) &= \frac{1}{\sqrt{\beta_s \beta_0}} ((\alpha_0 - \alpha_s) \cos\psi_s - (1 + \alpha_0 \alpha_s) \sin\psi_s) x_0 + \sqrt{\frac{\beta_0}{\beta_s}} (\cos\psi_s - \alpha_s \sin\psi_s) x'_0 \end{aligned}$$

Transfer Matrix in Terms of Beta Function

$$(5) \quad M = \begin{pmatrix} \sqrt{\frac{\beta_s}{\beta_0}} (\cos\psi_s + \alpha_0 \sin\psi_s) & (\sqrt{\beta_s \beta_0} \sin\psi_s) \\ \frac{1}{\sqrt{\beta_s \beta_0}} ((\alpha_0 - \alpha_s) \cos\psi_s - (1 + \alpha_0 \alpha_s) \sin\psi_s) & \sqrt{\frac{\beta_0}{\beta_s}} (\cos\psi_s - \alpha_s \sin\psi_s) \end{pmatrix}$$

$$M = \begin{pmatrix} \sqrt{\frac{\beta_s}{\beta_0}}(\cos\psi_s + \alpha_0\sin\psi_s) & (\sqrt{\beta_s\beta_0}\sin\psi_s) \\ \frac{1}{\sqrt{\beta_s\beta_0}}((\alpha_0 - \alpha_s)\cos\psi_s - (1 + \alpha_0\alpha_s)\sin\psi_s) & \sqrt{\frac{\beta_0}{\beta_s}}(\cos\psi_s - \alpha_s\sin\psi_s) \end{pmatrix}$$

In a periodic lattice Twiss parameters will have the same value as their initial values after a full turn.

$$\beta_s = \beta_{s+L} \quad \alpha_s = \alpha_{s+L} \quad \gamma_s = \gamma_{s+L} \quad \longrightarrow \quad \beta_0 = \beta_s, \alpha_0 = \alpha_s,$$

$$M(1,1) \quad \cos\psi_{turn} + \alpha_s\sin\psi_{turn}$$

$$M(1,2) \quad \beta_s\sin\psi_{turn}$$

$$M(2,1) \quad -\frac{(1 + \alpha_s^2)}{\beta_s}\sin\psi_{turn}$$

$$M(2,2) \quad \cos\psi_{turn} - \alpha_s\sin\psi_{turn}$$

Transfer Matrix for a Periodic Lattice

$$M(s) = \begin{pmatrix} \cos\psi_{turn} + \alpha_s\sin\psi_{turn} & \beta_s\sin\psi_{turn} \\ -\gamma_s\sin\psi_{turn} & \cos\psi_{turn} - \alpha_s\sin\psi_{turn} \end{pmatrix}$$

Transfer matrix for Twiss parameters

$$\begin{pmatrix} x \\ x' \end{pmatrix}_s = M * \begin{pmatrix} x \\ x' \end{pmatrix}_{s_0}$$

$$M = \begin{pmatrix} C & S \\ C' & S' \end{pmatrix}$$

$$\begin{pmatrix} x \\ x' \end{pmatrix}_0 = M^{-1} * \begin{pmatrix} x \\ x' \end{pmatrix}_s$$

$$M^{-1} = \begin{pmatrix} S' & -S \\ -C' & C \end{pmatrix}$$

$$\begin{aligned} x_0 &= S'x - Sx' \\ x'_0 &= -C'x + Cx' \end{aligned}$$

$\epsilon = \text{constant}$

Liouville Theorem

$$\epsilon = \beta_s x'^2 + 2\alpha_s x x' + \gamma_s x^2$$

$$\epsilon = \beta_0 x_0'^2 + 2\alpha_0 x_0 x_0' + \gamma_0 x_0^2$$

► Substitute x_0 and x_0' in the equation; reorganise in terms of x and x' , then compare the coefficients.

$$\epsilon = \beta_0 (Cx' - C'x)^2 + 2\alpha_0 (S'x - Sx')(Cx' - C'x) + \gamma_0 (S'x - Sx')^2$$

Transfer matrix for Twiss Parameters

$$\beta(s) = C^2 \beta_0 - 2SC\alpha_0 + S^2 \gamma_0$$

$$\alpha(s) = -CC'\beta_0 + (SC' + S'C)\alpha_0 - SS'\gamma_0$$

$$\gamma(s) = C'^2 \beta_0 - sS'C'\alpha_0 + S'^2 \gamma_0$$

$$\begin{pmatrix} \beta \\ \alpha \\ \gamma \end{pmatrix}_s = \begin{pmatrix} C^2 & -2SC & S^2 \\ -CC' & SC' + CS' & -SS' \\ C'^2 & -SS' & S'^2 \end{pmatrix} \begin{pmatrix} \beta_0 \\ \alpha_0 \\ \gamma_0 \end{pmatrix}$$

► Twiss parameters given at any point of the lattice and an appropriate transfer matrix can be used to calculate the values of the parameters at another location at the ring.

► Transfer matrix depends on the focusing properties of the lattice.

In summary...

Transfer Matrix for Periodic Lattice

$$M = \begin{pmatrix} \cos\mu + \alpha(s)\sin\mu & \beta(s)\sin\mu \\ -\gamma(s)\sin\mu & \cos\mu - \alpha(s)\sin\mu \end{pmatrix}$$

Stability condition

$$\text{Trace}(M) < 2$$

Transfer Matrix for Twiss Parameters


$$\begin{pmatrix} \beta \\ \alpha \\ \gamma \end{pmatrix}_s = \begin{pmatrix} C^2 & -2SC & S^2 \\ -CC' & SC' + CS' & -SS' \\ C'^2 & -SS' & S'^2 \end{pmatrix} \begin{pmatrix} \beta_0 \\ \alpha_0 \\ \gamma_0 \end{pmatrix}$$

- ▶ Twiss matrix is simpler for periodic lattices.
- ▶ Twiss parameters α , β , γ , depend on the position, “s”, around the ring.
- ▶ Phase advance, μ , is independent of the position.

-.-.-.-.-

Let's Remember the FODO Cell

-.-.-.-.-

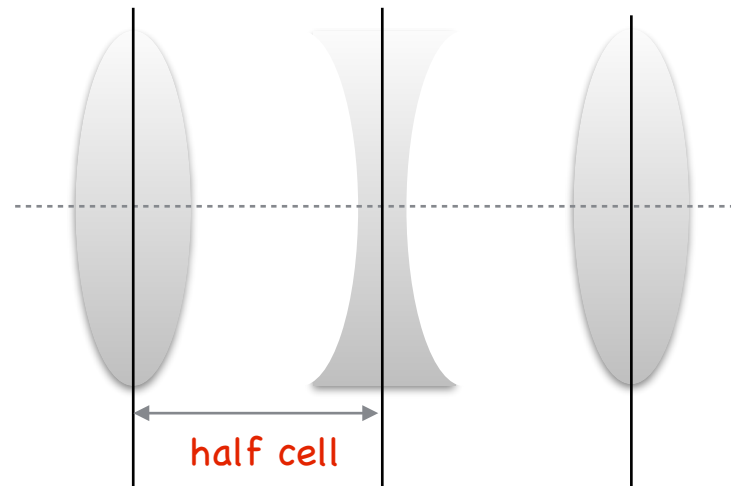

$$M_{FODO} = M_{QF} * M_D * M_{QD} * M_D * M_{QF}$$

$$M_{QF} = \begin{pmatrix} \cos \sqrt{|K|}s & \frac{1}{\sqrt{|K|}} \sin \sqrt{|K|}s \\ -\sqrt{|K|} \sin \sqrt{|K|}s & \cos \sqrt{|K|}s \end{pmatrix}$$

$$M_D = \begin{pmatrix} 1 & l_d \\ 0 & 1 \end{pmatrix}$$

-.-.-.-.-

Let's Remember the FODO Cell

-.-.-.-.-

Transfer matrix of a FODO cell under thin lens approximation:

$$M_{FODO} = \begin{pmatrix} 1 - \frac{l^2}{2f^2} & 2l(1 - \frac{l}{2f}) \\ -\frac{l}{2f^2}(1 + \frac{l}{2f}) & 1 - \frac{l^2}{2f^2} \end{pmatrix}$$

Phase advance in terms of FODO cell parameters in a periodic lattice:

Trace of a transfer matrix

$$\cos(\mu) = \frac{1}{2} \left(1 - \frac{l_D^2}{2f^2} + 1 - \frac{l_D^2}{2f^2} \right)$$

$$1 - 2\sin^2(\mu/2) = \left(1 - \frac{l_D^2}{2f^2} \right)$$

$$\sin(\mu/2) = \frac{L_{Cell}}{4f} = \frac{L_{Cell}}{2\tilde{f}}$$

f is due to the half length of a quadrupole.

$$\tilde{f} = 2f$$

Drift length is half the cell length.

$$l_D = L_{Cell}/2$$

-.-.-.-.-. Let's Remember the FODO Cell -.-.-.-.-.

Magnetic length and strength of quadrupoles:

$$K = \pm 0.54102 m^{-2}$$

$$l_q = 0.5 m$$

$$l_d = 2.5 m$$

$$M_{FODO} = \begin{pmatrix} 0.707 & 8.206 \\ -0.061 & 0.707 \end{pmatrix} \quad \text{Using thick lenses.}$$

Stability of a FODO cell:

$$\text{Trace}(M_{FODO}) = 1.415 \rightarrow < 2$$

Phase advance per cell:

$$M(s) = \begin{pmatrix} \cos\psi_{turn} + \alpha_s \sin\psi_{turn} & \beta_s \sin\psi_{turn} \\ -\gamma_s \sin\psi_{turn} & \cos\psi_{turn} - \alpha_s \sin\psi_{turn} \end{pmatrix}$$

$$\cos(\mu) = \frac{1}{2} * \text{Trace}(M_{FODO}) = 0.707$$

$$\mu = \arccos\left(\frac{1}{2} * \text{Trace}(M_{FODO})\right) = 45^\circ$$

Alpha and beta functions:

$$\alpha = \frac{M(1,1) - \cos(\mu)}{\sin(\mu)} = 0 \quad \beta = \frac{M(1,2)}{\sin(\mu)} = 11.611 m$$

Summary...

Phase advance per FODO cell
(under thin lens approximation)

$$\sin \frac{\mu}{2} = \frac{L_{Cell}}{4f_Q}$$

Stability of a FODO cell

$$f_Q > \frac{L_{Cell}}{4}$$

L_{Cell} , length of the FODO cell

f_Q , focal length of a quadrupole

μ , phase advance per cell

Beta functions in a FODO cell (under thin lens approximation)

Remember...

$$M = \begin{pmatrix} \sqrt{\frac{\beta_s}{\beta_0}}(\cos\psi_s + \alpha_0\sin\psi_s) & (\sqrt{\beta_s\beta_0}\sin\psi_s) \\ \frac{1}{\sqrt{\beta_s\beta_0}}((\alpha_0 - \alpha_s)\cos\psi_s - (1 + \alpha_0\alpha_s)\sin\psi_s) & \sqrt{\frac{\beta_0}{\beta_s}}(\cos\psi_s - \alpha_s\sin\psi_s) \end{pmatrix}$$

- ▶ In a FODO cell, $\alpha=0$ in the centre of a focusing quadrupole.
- ▶ Therefore, the beta functions evolve from $\beta_{\max}$ to $\beta_{\min}$ along the first half of the cell.


$$M = \begin{pmatrix} C & S \\ C' & S' \end{pmatrix} = \begin{pmatrix} \sqrt{\frac{\tilde{\beta}}{\hat{\beta}}}\cos\mu/2 & (\sqrt{\tilde{\beta}\hat{\beta}}\sin\mu/2) \\ -\frac{1}{\sqrt{\hat{\beta}\tilde{\beta}}}\sin\mu/2 & \sqrt{\frac{\hat{\beta}}{\tilde{\beta}}}\cos\mu/2 \end{pmatrix}$$

[back...](#)

Beta functions in a FODO cell (under thin lens approximation)

Let's move from the first focusing magnet to defocusing magnet in a FODO cell...

$$M_{FoDo} = \begin{pmatrix} 1 - \frac{l^2}{2f^2} & 2l(1 - \frac{l}{2f}) \\ -\frac{l}{2f^2}(1 + \frac{l}{2f}) & 1 - \frac{l^2}{2f^2} \end{pmatrix}$$

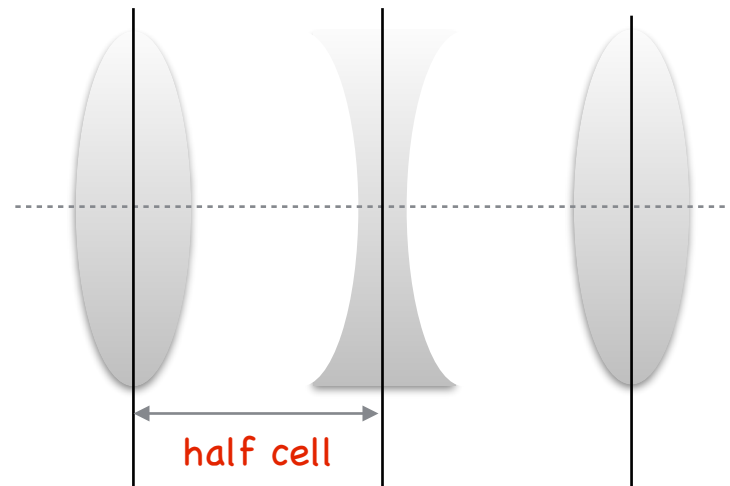

From QF to QD

$$M = \begin{pmatrix} 1 - \frac{l_d}{2f} & l_d \\ -\frac{l_d}{4f^2} & 1 + \frac{l_d}{2f} \end{pmatrix} = \begin{pmatrix} C & S \\ C' & S' \end{pmatrix} = \begin{pmatrix} \sqrt{\frac{\hat{\beta}}{\check{\beta}}} \cos \mu/2 & (\sqrt{\hat{\beta}\check{\beta}} \sin \mu/2) \\ -\frac{1}{\sqrt{\hat{\beta}\check{\beta}}} \sin \mu/2 & \sqrt{\frac{\hat{\beta}}{\check{\beta}}} \cos \mu/2 \end{pmatrix}$$

$$\frac{S'}{C} = \frac{\hat{\beta}}{\check{\beta}} = \frac{1 + \frac{l_d}{2f}}{1 - \frac{l_d}{2f}} = \frac{1 + \sin \mu/2}{1 - \sin \mu/2}$$

$$\frac{S}{C'} = \hat{\beta}\check{\beta} = 4f^2 = \frac{l_d^2}{\sin^2 \mu/2}$$

$$\hat{B} = \frac{(1 + \sin \frac{\mu}{2}) L_{Cell}}{\sin \mu}$$

$$\check{B} = \frac{(1 - \sin \frac{\mu}{2}) L_{Cell}}{\sin \mu}$$

In addition...

Dispersion for a FODO cell:

$$\hat{D} = \frac{l^2}{\rho} * \frac{1 + \frac{1}{2} \sin \frac{\mu}{2}}{\sin^2 \frac{\mu}{2}}$$

$$\check{D} = \frac{l^2}{\rho} * \frac{1 - \frac{1}{2} \sin \frac{\mu}{2}}{\sin^2 \frac{\mu}{2}}$$

Low dispersion:

- weak dipoles
- large angle
- shorter cells

Chromaticity for a FODO cell:

$$Q'_{total} = -\frac{1}{4\pi} \oint (K(s) - mD(s))\beta(s)ds$$

Low chromaticity:

- weak focusing
- small β

Summary...

- ▶ An arc on a ring type accelerator (storage ring etc.) generally consists of magnetic elements which repeats periodically, such as: FODO lattice.
- ▶ Quadrupole values in an arc can give an initial idea of the beam parameters in that arc.